



How to build **SUPERSHELF** Instructions

For bays up to 2½ metres high.

(ACT 082/3 June 06)

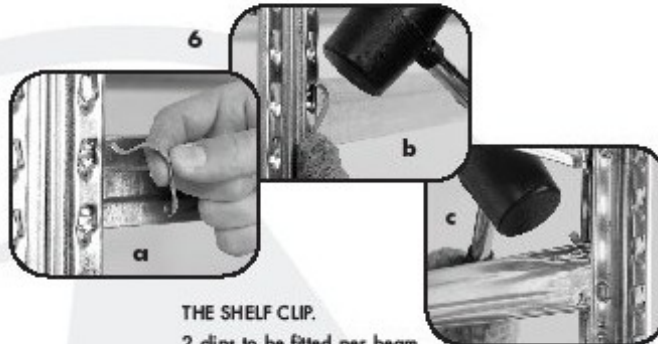

THE SHELF CLIP.
2 clips to be fitted per beam
(Teach end)
a) insert clip
b) tap into position
c) bend over top of beam

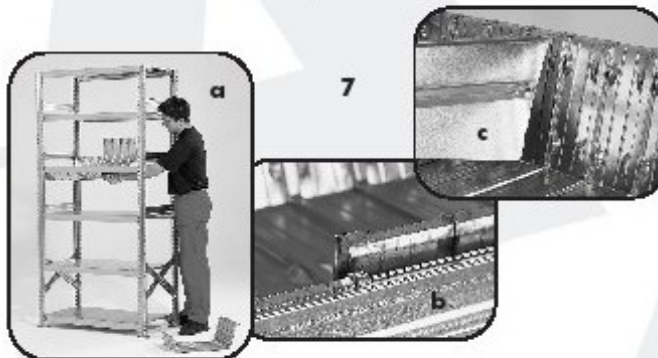

MODULAR CONTAINER (optional accessory)
a) back beam to be fitted 2 slots higher than
the front beam.
b) modular container overlap to fit
c) dividers slot into position



F 5 2 1 0 1 9

SUPERSHELF

Frequently Asked Questions

Do I need a bottom shelf?

YES! In nearly all cases this is required. If this causes a problem check with our sales office.

Do I need to fix the shelving to the floor or a wall?

This is recommended when the top loaded shelf (height) is equal to or greater than 4x the shelf depth (front to back).
Also sometimes recommended for racks with less than 4 bays.

Do I need to insert the beam clips?

YES! for the safety of your staff this is recommended.

Is there an upside and downside to the beam?

YES! the top side has a long groove.

What tools do I need to assemble the Supershef?

Only a soft faced hammer and safety steps if the height exceeds 2 metres.
We also recommend wearing gloves.

Do I need to stagger the beam heights when assembling modular containers?

YES! place the back beam 2 slots higher than the front beam.

